

**Z8[®] Family of
Microcomputers
Z8611 • Z8612 • Z8613**



**Product
Specification**

September 1982

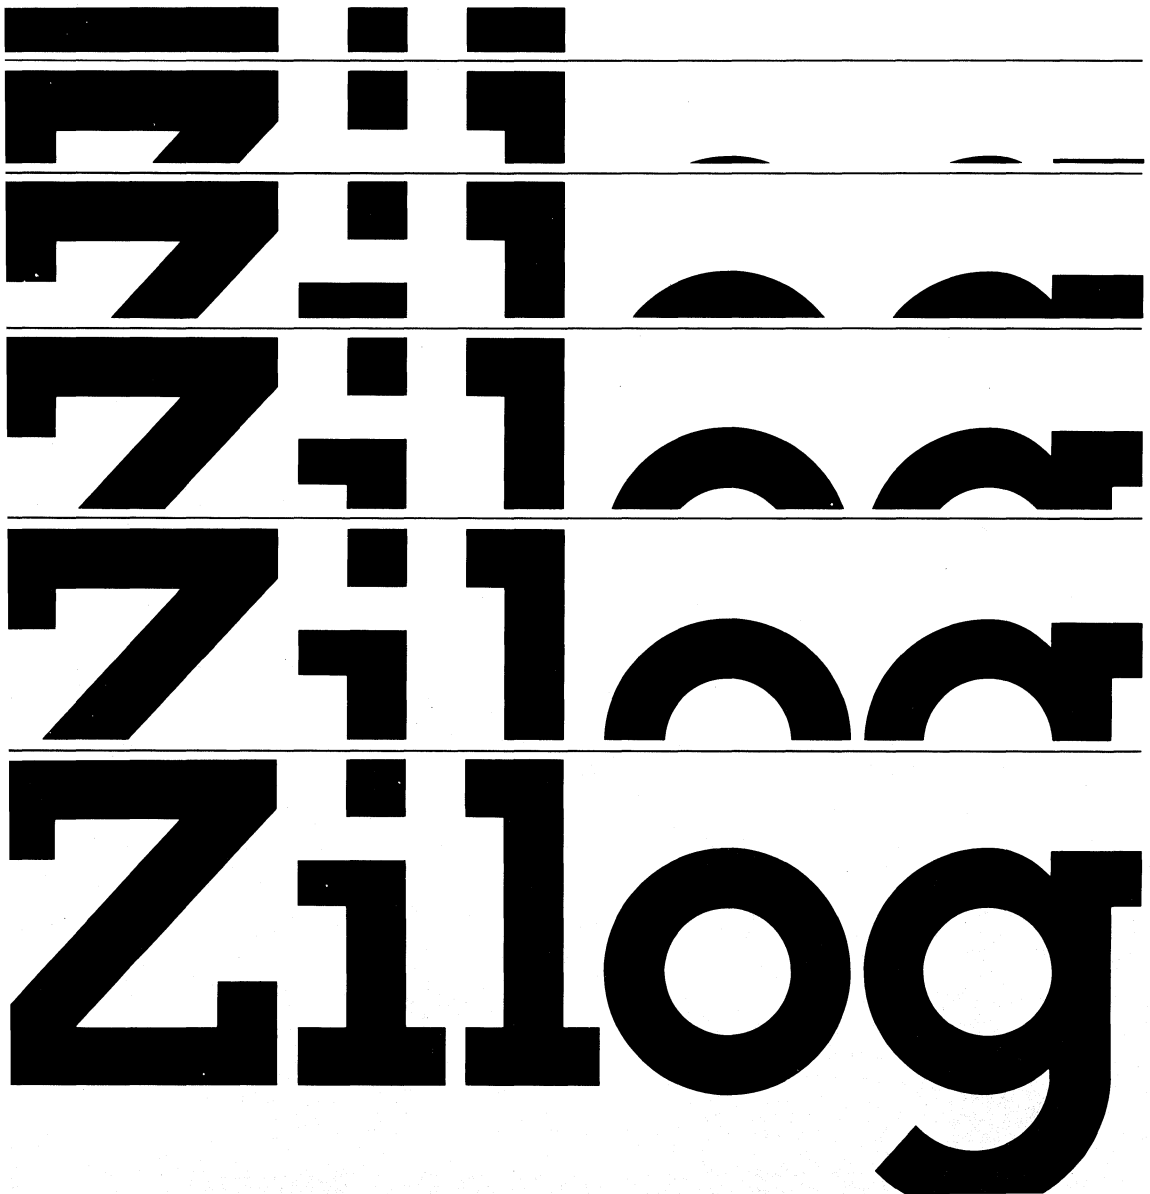

Copyright 1982 by Zilog, Inc. All rights reserved. No part of this publication may be reproduced without the written permission of Zilog, Inc. The information in this publication is subject to change without notice.

Z8® Family of Microcomputers

Z8611 • Z8612 • Z8613



Product Specification

September 1982

Z8611 Single-Chip Microcomputer with 4K ROM
 Z8612 Development Device with Memory Interface
 Z8613 Prototyping Device with EPROM Interface

Features

- Complete microcomputer, 4K bytes of ROM, 128 bytes of RAM, 32 I/O lines, and up to 60K bytes addressable external space each for program and data memory.
- 144-byte register file, including 124 general-purpose registers, four I/O port registers, and 16 status and control registers.
- Average instruction execution time of 2.2 μ s, maximum of 4.25 μ s.
- Vectored, priority interrupts for I/O, counter/timers, and UART.
- Full-duplex UART and two programmable 8-bit counter/timers, each with a 6-bit programmable prescaler.
- Register Pointer so that short, fast instructions can access any of nine working-register groups in 1.5 μ s.
- On-chip oscillator which accepts crystal or external clock drive.
- Low-power standby option which retains contents of general-purpose registers.
- Single +5 V power supply—all pins TTL compatible.

General Description

The Z8611 microcomputer introduces a new level of sophistication to single-chip architecture. Compared to earlier single-chip microcomputers, the Z8611 offers faster execution; more efficient use of memory; more sophisticated interrupt, input/output and bit-manipulation capabilities; and easier system expansion.

Under program control, the Z8611 can be tailored to the needs of its user. It can be con-

figured as a stand-alone microcomputer with 4K bytes of internal ROM, a traditional microprocessor that manages up to 120K bytes of external memory, or a parallel-processing element in a system with other processors and peripheral controllers linked by the Z-BUS. In all configurations, a large number of pins remain available for I/O.

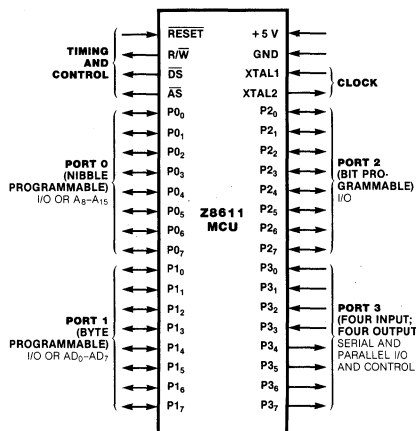


Figure 1. Z8611 MCU Pin Functions

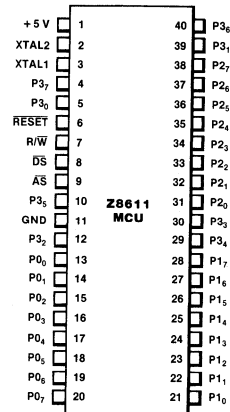


Figure 2. Z8611 MCU Pin Assignments

Architecture

Z8611 architecture is characterized by a flexible I/O scheme, an efficient register and address space structure and a number of ancillary features that are helpful in many applications.

Microcomputer applications demand powerful I/O capabilities. The Z8611 fulfills this with 32 pins dedicated to input and output. These lines are grouped into four ports of eight lines each and are configurable under software control to provide timing, status signals, serial or parallel I/O with or without handshake, and an address/data bus for interfacing external memory.

Because the multiplexed address/data bus is merged with the I/O-oriented ports, the Z8611 can assume many different memory and I/O configurations. These configurations range from a self-contained microcomputer to a

microprocessor that can address 120K bytes of external memory (Figure 3).

Three basic address spaces are available to support this wide range of configurations: program memory (internal and external), data memory (external) and the register file (internal). The 144-byte random-access register file is composed of 124 general-purpose registers, four I/O port registers, and 16 control and status registers.

To unburden the program from coping with real-time problems such as serial data communication and counting/timing, an asynchronous receiver/transmitter (UART) and two counter/timers with a large number of user-selectable modes are offered on-chip. Hardware support for the UART is minimized because one of the on-chip timers supplies the bit rate.

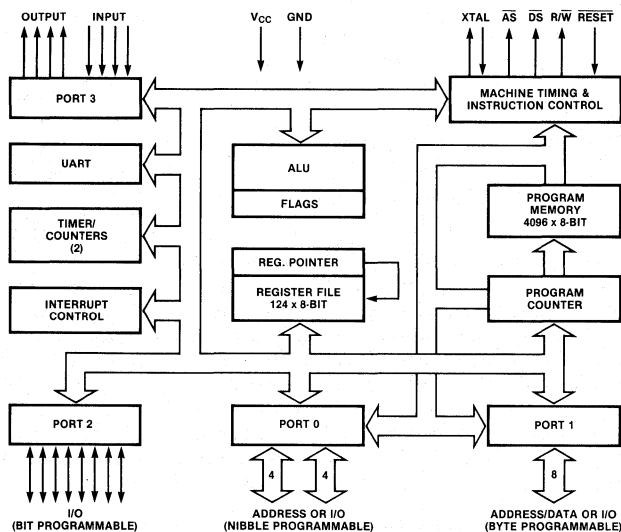


Figure 3. Functional Block Diagram

Pin Description

\overline{AS} . Address Strobe (output, active Low). Address Strobe is pulsed once at the beginning of each machine cycle. Addresses output via Port 1 for all external program or data memory transfers are valid at the trailing edge of \overline{AS} . Under program control, \overline{AS} can be placed in the high-impedance state along with Ports 0 and 1, Data Strobe and Read/Write.

\overline{DS} . Data Strobe (output, active Low). Data Strobe is activated once for each external memory transfer.

P0₀-P0₇, P1₀-P1₇, P2₀-P2₇, P3₀-P3₇. I/O Port Lines (input/outputs, TTL-compatible). These 32 lines are divided into four 8-bit I/O ports

that can be configured under program control for I/O or external memory interface.

RESET. Reset (input, active Low). \overline{RESET} initializes the Z8611. When \overline{RESET} is deactivated, program execution begins from internal program location 000C_H.

R/ \overline{W} . Read/Write (output). R/ \overline{W} is Low when the Z8611 is writing to external program or data memory.

XTAL1, XTAL2. Crystal 1, Crystal 2 (time-base input and output). These pins connect a series-resonant crystal (8 MHz maximum) or an external single-phase clock (8 MHz maximum) to the on-chip clock oscillator and buffer.

Address Spaces

Program Memory. The 16-bit program counter addresses 64K bytes of program memory space. Program memory can be located in two areas: one internal and the other external (Figure 4). The first 4096 bytes consist of on-chip mask-programmed ROM. At addresses 4096 and greater, the Z8611 executes external program memory fetches.

The first 12 bytes of program memory are reserved for the interrupt vectors. These locations contain six 16-bit vectors that correspond to the six available interrupts.

Data Memory. The Z8611 can address 60K bytes of external data memory beginning at

locations 4096 (Figure 5). External data memory may be included with or separated from the external program memory space. DM, an optional I/O function that can be programmed to appear on pin P3₄, is used to distinguish between data and program memory space.

Register File. The 144-byte register file includes four I/O port registers (R0-R3), 124 general-purpose registers (R4-R127) and 16 control and status registers (R240-R255). These registers are assigned the address locations shown in Figure 6.

Z8611 instructions can access registers

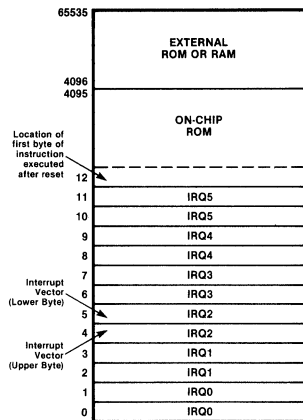


Figure 4. Program Memory Map

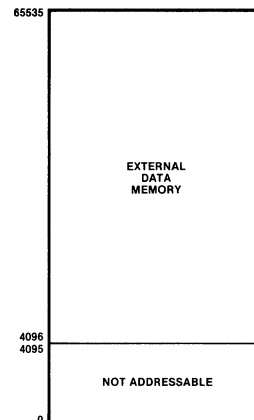


Figure 5. Data Memory Map

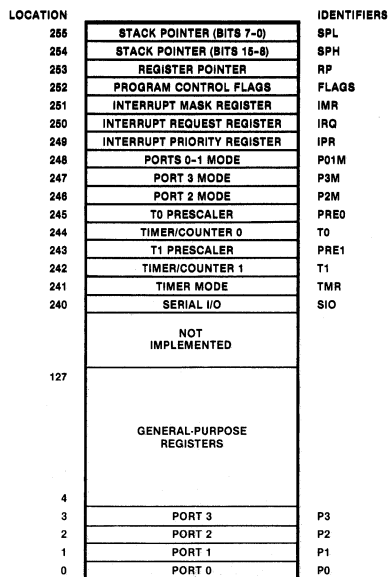


Figure 6. The Register File

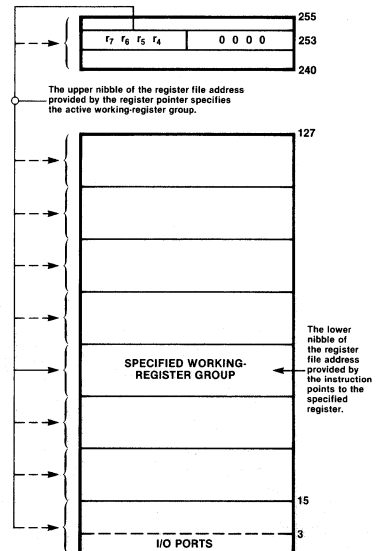


Figure 7. The Register Pointer

Address Spaces
(Continued)

directly or indirectly with an 8-bit address field. The Z8611 also allows short 4-bit register addressing using the Register Pointer (one of the control registers). In the 4-bit mode, the register file is divided into nine working-register groups, each occupying 16 contiguous locations (Figure 7). The Register Pointer addresses the starting location of the active working-register group.

Serial Input/Output

Port 3 lines P3₀ and P3₇ can be programmed as serial I/O lines for full-duplex serial asynchronous receiver/transmitter operation. The bit rate is controlled by Counter/Timer 0, with a maximum rate of 62.5K bits/second.

The Z8611 automatically adds a start bit and two stop bits to transmitted data (Figure 8). Odd parity is also available as an option. Eight data bits are always transmitted, regardless of

Stacks. Either the internal register file or the external data memory can be used for the stack. A 16-bit Stack Pointer (R254 and R255) is used for the external stack, which can reside anywhere in data memory between locations 4096 and 65535. An 8-bit Stack Pointer (R255) is used for the internal stack that resides within the 124 general-purpose registers (R4–R127).

parity selection. If parity is enabled, the eighth bit is the odd parity bit. An interrupt request (IRQ₄) is generated on all transmitted characters.

Received data must have a start bit, eight data bits and at least one stop bit. If parity is on, bit 7 of the received data is replaced by a parity error flag. Received characters generate the IRQ₃ interrupt request.

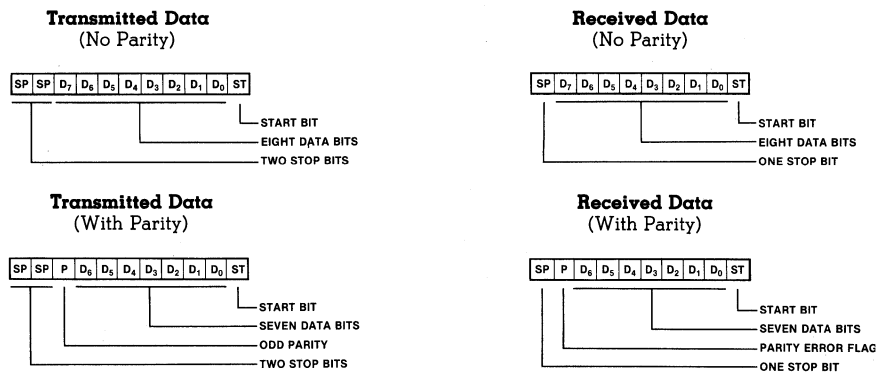


Figure 8. Serial Data Formats

Counter/Timers

The Z8611 contains two 8-bit programmable counter/timers (T₀ and T₁), each driven by its own 6-bit programmable prescaler. The T₁ prescaler can be driven by internal or external clock sources; however, the T₀ prescaler is driven by the internal clock only.

The 6-bit prescalers can divide the input frequency of the clock source by any number from 1 to 64. Each prescaler drives its counter, which decrements the value (1 to 256) that has been loaded into the counter. When the counter reaches the end of count, a timer interrupt request—IRQ₄ (T₀) or IRQ₅ (T₁)—is generated.

The counters can be started, stopped, restarted to continue, or restarted from the initial value. The counters can also be programmed to stop upon reaching zero (single-

pass mode) or to automatically reload the initial value and continue counting (modulo-n continuous mode). The counters, but not the prescalers, can be read any time without disturbing their value or count mode.

The clock source for T₁ is user-definable and can be the internal microprocessor clock (4 MHz maximum) divided by four, or an external signal input via Port 3. The Timer Mode register configures the external timer input as an external clock (1 MHz maximum), a trigger input that can be retriggerable or non-retriggerable, or as a gate input for the internal clock. The counter/timers can be programmably cascaded by connecting the T₀ output to the input of T₁. Port 3 line P3₆ also serves as a timer output (T_{OUT}) through which T₀, T₁ or the internal clock can be output.

I/O Ports

The Z8611 has 32 lines dedicated to input and output. These lines are grouped into four ports of eight lines each and are configurable as input, output or address/data. Under software control, the ports can be programmed to

Port 1 can be programmed as a byte I/O port or as an address/data port for interfacing external memory. When used as an I/O port, Port 1 may be placed under handshake control. In this configuration, Port 3 lines P3₃ and P3₄ are used as the handshake controls RDY₁ and DAV₁ (Ready and Data Available).

Memory locations greater than 4096 are referenced through Port 1. To interface external memory, Port 1 must be programmed for the multiplexed Address/Data mode. If more than 256 external locations are required, Port 0 must output the additional lines.

Port 1 can be placed in the high-impedance state along with Port 0, \overline{AS} , \overline{DS} and R/W,

Port 0 can be programmed as a nibble I/O port, or as an address port for interfacing external memory. When used as an I/O port, Port 0 may be placed under handshake control. In this configuration, Port 3 lines P3₂ and P3₅ are used as the handshake controls \overline{DAV}_0 and RDY₀. Handshake signal assignment is dictated by the I/O direction of the upper nibble P0₄-P0₇.

For external memory references, Port 0 can provide address bits A₈-A₁₁ (lower nibble) or A₈-A₁₅ (lower and upper nibble) depending on the required address space. If the address range requires 12 bits or less, the upper nibble of Port 0 can be programmed independently as

Port 2 bits can be programmed independently as input or output. This port is always available for I/O operations. In addition, Port 2 can be configured to provide open-drain outputs.

Like Ports 0 and 1, Port 2 may also be placed under handshake control. In this configuration, Port 3 lines P3₁ and P3₆ are used as the handshake controls lines \overline{DAV}_2 and RDY₂. The handshake signal assignment for Port 3 lines P3₁ and P3₆ is dictated by the direction (input or output) assigned to bit 7 of Port 2.

Port 3 lines can be configured as I/O or control lines. In either case, the direction of the eight lines is fixed as four input (P3₀-P3₃) and four output (P3₄-P3₇). For serial I/O, lines P3₀ and P3₇ are programmed as serial in and serial out respectively.

Port 3 can also provide the following control functions: handshake for Ports 0, 1 and 2 (\overline{DAV} and RDY); four external interrupt request signals (IRQ₀-IRQ₃); timer input and output signals (T_{IN} and T_{OUT}) and Data Memory Select (\overline{DM}).

provide address outputs, timing, status signals, serial I/O, and parallel I/O with or without handshake. All ports have active pull-ups and pull-downs compatible with TTL loads.

allowing the Z8611 to share common resources in multiprocessor and DMA applications. Data transfers can be controlled by assigning P3₃ as a Bus Acknowledge input, and P3₄ as a Bus Request output.




Figure 9a. Port 1

I/O while the lower nibble is used for addressing. When Port 0 nibbles are defined as address bits, they can be set to the high-impedance state along with Port 1 and the control signals \overline{AS} , \overline{DS} and R/W.




Figure 9b. Port 0




Figure 9c. Port 2




Figure 9d. Port 3

Interrupts

The Z8611 allows six different interrupts from eight sources: the four Port 3 lines P3₀-P3₃, Serial In, Serial Out, and the two counter/timers. These interrupts are both maskable and prioritized. The Interrupt Mask register globally or individually enables or disables the six interrupt requests. When more than one interrupt is pending, priorities are resolved by a programmable priority encoder that is controlled by the Interrupt Priority register.

All Z8611 interrupts are vectored. When an interrupt request is granted, an interrupt machine cycle is entered. This disables all

subsequent interrupts, saves the Program Counter and status flags, and branches to the program memory vector location reserved for that interrupt. This memory location and the next byte contain the 16-bit address of the interrupt service routine for that particular interrupt request.

Polled interrupt systems are also supported. To accommodate a polled structure, any or all of the interrupt inputs can be masked and the Interrupt Request register polled to determine which of the interrupt requests needs service.

Clock

The on-chip oscillator has a high-gain, series-resonant amplifier for connection to a crystal or to any suitable external clock source (XTAL1 = Input, XTAL2 = Output).

The crystal source is connected across XTAL1 and XTAL2, using the recommended capacitors ($C_1 = 15 \text{ pF}$) from each pin to

ground. The specifications for the crystal are as follows:

- AT cut, series resonant
- Fundamental type, 8 MHz maximum
- Series resistance, $R_s \leq 100 \Omega$

Power Down Standby Option

The low-power standby mode allows power to be removed without losing the contents of the 124 general-purpose registers. This mode is available to the user as a bonding option whereby pin 2 (normally XTAL2) is replaced by the V_{MM} (standby) power supply input. This necessitates the use of an external clock generator (input = XTAL1) rather than a crystal source.

The removal of power, whether intended or due to power failure, must be preceded by a software routine that stores the appropriate status into the register file. Figure 10 shows

the recommended circuit for a battery back-up supply system.




Figure 10. Recommended Driver Circuit for Power Down Operation

Z8612 Development Device

This 64-pin development version of the 40-pin mask-programmed Z8611 (Figure 11) allows the user to prototype the system in hardware with an actual device and to develop the code that is eventually mask-programmed into the on-chip ROM of the Z8611.

The Z8612 is identical to the Z8611 with the following exceptions:

- The internal ROM has been removed.
- The ROM address lines and data lines are buffered and brought out to external pins.
- Control lines for the new memory have been added.

Pin Description. The functions of the Z8612 I/O lines, \overline{AS} , \overline{DS} , R/W, XTAL1, XTAL2 and RESET are identical to those of their Z8611 counterparts. The functions of the remaining 24 pins are as follows:

A₀-A₁₁. Program Memory Address (outputs). A₀-A₁₁ access the first 4K bytes of program memory.

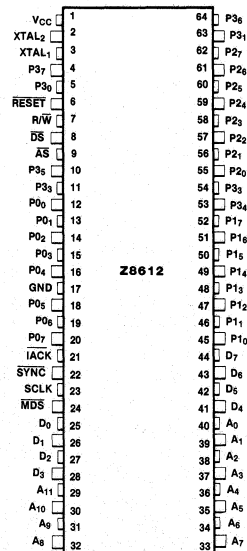


Figure 11. Z8612 Pin Assignments

8612
Development
Device
 (Continued)

D₀-D₇. *Program Data* (inputs). Program data from the first 4K bytes of program memory is input through pins D₀-D₇.

IACK. *Interrupt Acknowledge* (output, active High). IACK is driven High in response to an interrupt during the interrupt machine cycle.

MDS. *Program Memory Data Strobe* (output, active Low). MDS is Low during an instruction fetch cycle when the first 4K bytes of program memory are being accessed.

SCLK. *System Clock* (output). SCLK is the internal clock output through a buffer. The clock rate is equal to one-half the crystal frequency.

SYNC. *Instruction Sync* (output, active Low). This strobe output is forced Low during the internal clock period preceding an opcode fetch.

8613
Protopack
Emulator

The Z8613 MPE (Protopack) is used for prototype development and preproduction of mask-programmed applications. The Protopack is a ROMless version of the standard Z8611, housed in a pin-compatible 40-pin package (Figure 12).

To provide pin compatibility and interchangeability with the standard mask-programmed device, the Protopack carries (piggy-backs) a 24-pin socket for a direct interface to program memory (Figure 1). The 24-pin socket is equipped with 12 ROM

address lines, 8 ROM data lines and necessary control lines for interface to 2732 EPROM for the first 4K bytes of program memory.

Pin compatibility allows the user to design the pc board for a final 40-pin mask-programmed Z8611, and, at the same time, allows the use of the Protopack to build the prototype and pilot production units. When the final program is established, the user can then switch over to the 40-pin mask-programmed Z8611 for large volume production. The Protopack is also useful in small volume applications where masked ROM setup time, mask charges, etc., are prohibitive and program flexibility is desired.

Compared to the conventional EPROM versions of the single-chip microcomputers, the Protopack approach offers two main advantages:

- Ease of developing various programs during the prototyping stage: For instance, in applications where the same hardware configuration is used with more than one program, the Z8613 Protopack allows economical program storage in separate EPROMs (or PROMs), whereas the use of separate EPROM-based single-chip microcomputers is more costly.
- Elimination of long lead time in procuring EPROM-based microcomputers.

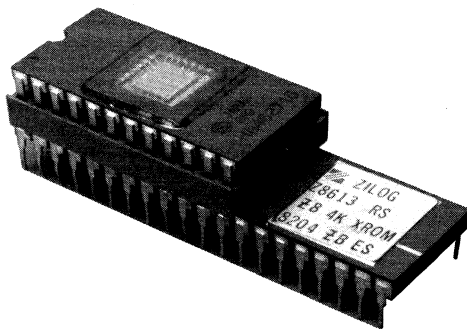


Figure 12. The Z8613 Microcomputer Protopack Emulator

Instruction
Set
Notation

Addressing Modes. The following notation is used to describe the addressing modes and instruction operations as shown in the instruction summary.

IRR	Indirect register pair or indirect working-register pair address
Irr	Indirect working-register pair only
X	Indexed address
DA	Direct address
RA	Relative address
IM	Immediate
R	Register or working-register address
r	Working-register address only
IR	Indirect-register or indirect working-register address
Ir	Indirect working-register address only
RR	Register pair or working register pair address

Symbols. The following symbols are used in describing the instruction set.

dst	Destination location or contents
src	Source location or contents
cc	Condition code (see list)
@	Indirect address prefix
SP	Stack pointer (control registers 254-255)
PC	Program counter
FLAGS	Flag register (control register 252)
RP	Register pointer (control register 253)
IMR	Interrupt mask register (control register 251)

Assignment of a value is indicated by the symbol “-”. For example,

$$\text{dst} - \text{dst} + \text{src}$$

indicates that the source data is added to the destination data and the result is stored in the destination location. The notation “addr(n)” is used to refer to bit “n” of a given location. For example,

$$\text{dst} (7)$$

refers to bit 7 of the destination operand.

Instruction Set Notation
(Continued)

Flags. Control Register R252 contains the following six flags:

- C** Carry flag
- Z** Zero flag
- S** Sign flag
- V** Overflow flag
- D** Decimal-adjust flag
- H** Half-carry flag

Affected flags are indicated by:


- 0** Cleared to zero
- 1** Set to one
- *** Set or cleared according to operation
- Unaffected
- X** Undefined

Condition Codes	Value	Mnemonic	Meaning	Flags Set
	1000		Always true	---
	0111	C	Carry	C = 1
	1111	NC	No carry	C = 0
	0110	Z	Zero	Z = 1
	1110	NZ	Not zero	Z = 0
	1101	PL	Plus	S = 0
	0101	MI	Minus	S = 1
	0100	OV	Overflow	V = 1
	1100	NOV	No overflow	V = 0
	0110	EQ	Equal	Z = 1
	1110	NE	Not equal	Z = 0
	1001	GE	Greater than or equal	(S XOR V) = 0
	0001	LT	Less than	(S XOR V) = 1
	1010	GT	Greater than	[Z OR (S XOR V)] = 0
	0010	LE	Less than or equal	[Z OR (S XOR V)] = 1
	1111	UGE	Unsigned greater than or equal	C = 0
	0111	ULT	Unsigned less than	C = 1
	1011	UGT	Unsigned greater than	(C = 0 AND Z = 0) = 1
	0011	ULE	Unsigned less than or equal	(C OR Z) = 1
	0000		Never true	---

Instruction Formats



One-Byte Instructions

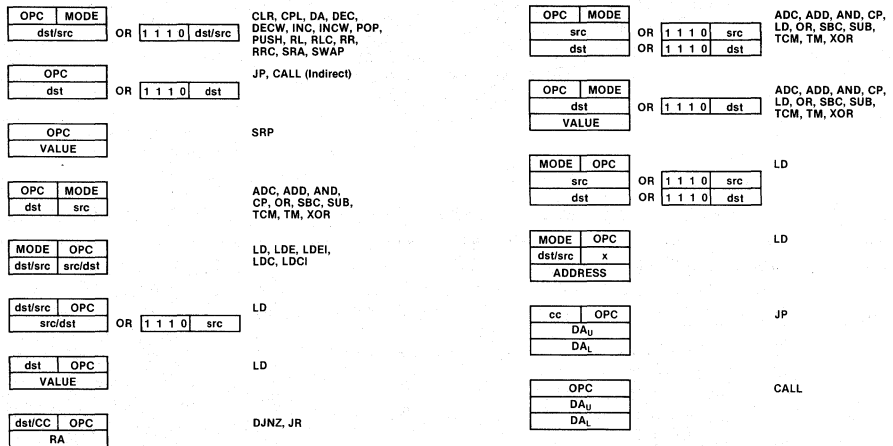







Two-Byte Instructions

Three-Byte Instructions

Figure 13. Instruction Formats

Instruction Summary

Instruction and Operation	Addr Mode		Opcode Byte (Hex)	Flags Affected						
	dst	src		C	Z	S	V	D	H	
ADC dst,src dst - dst + src + C	(Note 1)		1□	*	*	*	*	0	*	
ADD dst,src dst - dst + src	(Note 1)		0□	*	*	*	*	0	*	
AND dst,src dst - dst AND src	(Note 1)		5□	-	*	*	0	-	-	
CALL dst SP - SP - 2 @SP - PC; PC - dst	DA IRR		D6 D4	-	-	-	-	-	-	
CCF C - NOT C			EF	*	-	-	-	-	-	
CLR dst dst - 0	R IR		E0 E1	-	-	-	-	-	-	
COM dst dst - NOT dst	R IR		60 61	-	*	*	0	-	-	
CP dst,src dst - src	(Note 1)		A□	*	*	*	*	-	-	
DA dst dst - DA dst	R IR		40 41	*	*	*	X	-	-	
DEC dst dst - dst - 1	R IR		00 01	-	*	*	*	-	-	
DECW dst dst - dst - 1	RR IR		80 81	-	*	*	*	-	-	
DI IMR (7) - 0			8F	-	-	-	-	-	-	
DJNZ r,dst r - r - 1 if r ≠ 0 PC - PC + dst Range: +127, -128	RA		rA r=0-F	-	-	-	-	-	-	
EI IMR (7) - 1			9F	-	-	-	-	-	-	
INC dst dst - dst + 1	r R IR		rE r=0-F 20 21	-	*	*	*	-	-	
INCW dst dst - dst + 1	RR IR		A0 A1	-	*	*	*	-	-	
IRET FLAGS - @SP; SP - SP + 1 PC - @SP; SP - SP + 2; IMR (7) - 1			BF	*	*	*	*	*	*	
JP cc,dst if cc is true PC - dst	DA IRR		cD c=0-F 30	-	-	-	-	-	-	
JR cc,dst if cc is true, PC - PC + dst Range: +127, -128	RA		cB c=0-F	-	-	-	-	-	-	
LD dst,src dst - src	r R R r r X r r Ir R R R IR R IR R	Im R R r r X r r r R R R IR Im Im R	rC r8 r9 r=0-F C7 D7 E3 F3 E4 E5 E6 E7 F5	-	-	-	-	-	-	
LDC dst,src dst - src	r R	Irr r	C2 D2	-	-	-	-	-	-	
LDCI dst,src dst - src r - r + 1; rr - rr + 1	Ir R	Irr Ir	C3 D3	-	-	-	-	-	-	

Instruction and Operation	Addr Mode		Opcode Byte (Hex)	Flags Affected						
	dst	src		C	Z	S	V	D	H	
LDE dst,src dst - src	r Irr	Irr r	82 92	-	-	-	-	-	-	
LDEI dst,src dst - src r - r + 1; rr - rr + 1	Ir Irr	Irr Ir	83 93	-	-	-	-	-	-	
NOP			FF	-	-	-	-	-	-	
OR dst,src dst - dst OR src	(Note 1)		4□	-	*	*	0	-	-	
POP dst dst - @SP SP - SP + 1	R IR		50 51	-	-	-	-	-	-	
PUSH src SP - SP - 1; @SP - src	R IR		70 71	-	-	-	-	-	-	
RCF C - 0			CF	0	-	-	-	-	-	
RET PC - @SP; SP - SP + 2			AF	-	-	-	-	-	-	
RL dst	 R IR		90 91	*	*	*	*	-	-	
RLC dst	 R IR		10 11	*	*	*	*	-	-	
RR dst	 R IR		E0 E1	*	*	*	*	-	-	
RRC dst	 R IR		C0 C1	*	*	*	*	-	-	
SBC dst,src dst - dst - src - C	(Note 1)		3□	*	*	*	*	1	*	
SCF C - 1			DF	1	-	-	-	-	-	
SRA dst	 R IR		D0 D1	*	*	*	0	-	-	
SRP src RP - src		Im	31	-	-	-	-	-	-	
SUB dst,src dst - dst - src	(Note 1)		2□	*	*	*	*	1	*	
SWAP dst	 R IR		F0 F1	X	*	*	X	-	-	
TCM dst,src (NOT dst) AND src	(Note 1)		6□	-	*	*	0	-	-	
TM dst, src dst AND src	(Note 1)		7□	-	*	*	0	-	-	
XOR dst,src dst - dst XOR src	(Note 1)		B□	-	*	*	0	-	-	

Note 1


These instructions have an identical set of addressing modes, which are encoded for brevity. The first opcode nibble is found in the instruction set table above. The second nibble is expressed symbolically by a □ in this table, and its value is found in the following table to the left of the applicable addressing mode pair.

For example, to determine the opcode of an ADC instruction use the addressing modes r (destination) and Ir (source). The result is 13.


Addr Mode		Lower Opcode Nibble
dst	src	
r	r	2
r	Ir	3
R	R	4
R	IR	5
R	IM	6
IR	IM	7

Registers


R240 SIO Serial I/O Register (F0_H; Read/Write)




R244 T0 Counter/Timer 0 Register (F4_H; Read/Write)




R241 TMR Timer Mode Register (F1_H; Read/Write)

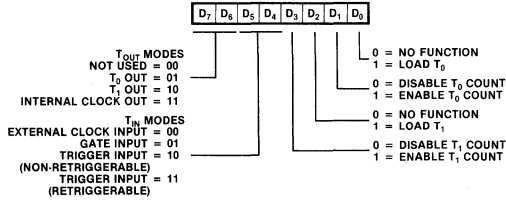


R245 PRE0 Prescaler 0 Register (F5_H; Write Only)




R242 T1 Counter Timer 1 Register (F2_H; Read/Write)



R246 P2M Port 2 Mode Register (F6_H; Write Only)



R243 PRE1 Prescaler 1 Register (F3_H; Write Only)

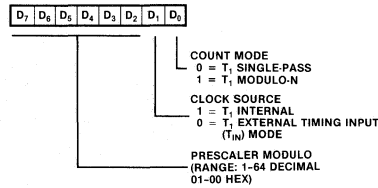

R247 P3M Port 3 Mode Register (F7_H; Write Only)


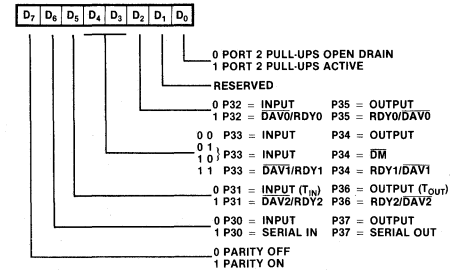



Figure 14. Control Registers

Registers
(Continued)


R248 P01M
Port 0 and 1 Mode Register
(F8_H; Write Only)

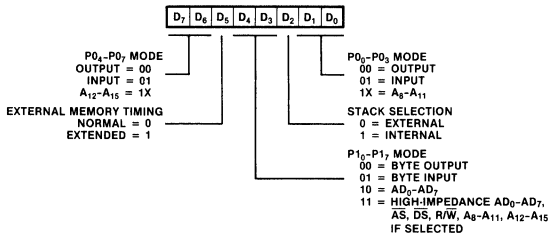


R252 FLAGS
Flag Register
(FC_H; Read/Write)




R249 IPR
Interrupt Priority Register
(F9_H; Write Only)

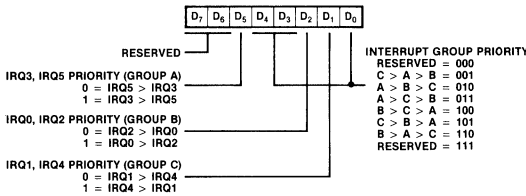


R253 RP
Register Pointer
(FD_H; Read/Write)

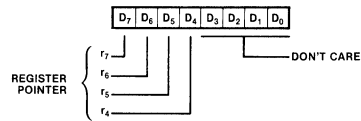


R250 IRQ
Interrupt Request Register
(FA_H; Read/Write)

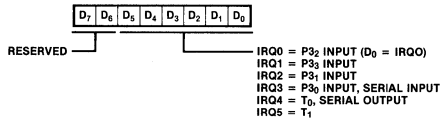

R254 SPH
Stack Pointer
(FE_H; Read/Write)



R251 IMR
Interrupt Mask Register
(FB_H; Read/Write)



R255 SPL
Stack Pointer
(FF_H; Read/Write)




Figure 14. Control Registers

Opcode Map

Lower Nibble (Hex)

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F	
Upper Nibble (Hex)	0	6,5 DEC R ₁	6,5 DEC IR ₁	6,5 ADD r ₁ , r ₂	6,5 ADD r ₁ , IR ₂	10,5 ADD R ₂ , R ₁	10,5 ADD IR ₂ , R ₁	10,5 ADD R ₁ , IM	10,5 ADD IR ₁ , IM	6,5 LD r ₁ , R ₂	6,5 LD r ₂ , R ₁	12/10,5 DJNZ r ₁ , RA	12/10,0 JR cc, RA	6,5 LD r ₁ , IM	12/10,0 JP cc, DA	6,5 INC r ₁	
	1	6,5 RLC R ₁	6,5 RLC IR ₁	6,5 ADC r ₁ , r ₂	6,5 ADC r ₁ , IR ₂	10,5 ADC R ₂ , R ₁	10,5 ADC IR ₂ , R ₁	10,5 ADC R ₁ , IM	10,5 ADC IR ₁ , IM								
	2	6,5 INC R ₁	6,5 INC IR ₁	6,5 SUB r ₁ , r ₂	6,5 SUB r ₁ , IR ₂	10,5 SUB R ₂ , R ₁	10,5 SUB IR ₂ , R ₁	10,5 SUB R ₁ , IM	10,5 SUB IR ₁ , IM								
	3	8,0 JP IRR ₁	6,1 SRP IM	6,5 SBC r ₁ , r ₂	6,5 SBC r ₁ , IR ₂	10,5 SBC R ₂ , R ₁	10,5 SBC IR ₂ , R ₁	10,5 SBC R ₁ , IM	10,5 SBC IR ₁ , IM								
	4	8,5 DA R ₁	8,5 DA IR ₁	6,5 OR r ₁ , r ₂	6,5 OR r ₁ , IR ₂	10,5 OR R ₂ , R ₁	10,5 OR IR ₂ , R ₁	10,5 OR R ₁ , IM	10,5 OR IR ₁ , IM								
	5	10,5 POP R ₁	10,5 POP IR ₁	6,5 AND r ₁ , r ₂	6,5 AND r ₁ , IR ₂	10,5 AND R ₂ , R ₁	10,5 AND IR ₂ , R ₁	10,5 AND R ₁ , IM	10,5 AND IR ₁ , IM								
	6	6,5 COM R ₁	6,5 COM IR ₁	6,5 TCM r ₁ , r ₂	6,5 TCM r ₁ , IR ₂	10,5 TCM R ₂ , R ₁	10,5 TCM IR ₂ , R ₁	10,5 TCM R ₁ , IM	10,5 TCM IR ₁ , IM								
	7	10/12,1 PUSH R ₂	12/14,1 PUSH IR ₂	6,5 TM r ₁ , r ₂	6,5 TM r ₁ , IR ₂	10,5 TM R ₂ , R ₁	10,5 TM IR ₂ , R ₁	10,5 TM R ₁ , IM	10,5 TM IR ₁ , IM								
	8	10,5 DECW RR ₁	10,5 DECW IR ₁	12,0 LDE r ₁ , IRR ₂	18,0 LDEI IR ₁ , IRR ₂												6,1 DI
	9	6,5 RL R ₁	6,5 RL IR ₁	12,0 LDE r ₂ , IRR ₁	18,0 LDEI IR ₂ , IRR ₁												6,1 EI
	A	10,5 INCW RR ₁	10,5 INCW IR ₁	6,5 CP r ₁ , r ₂	6,5 CP r ₁ , IR ₂	10,5 CP R ₂ , R ₁	10,5 CP IR ₂ , R ₁	10,5 CP R ₁ , IM	10,5 CP IR ₁ , IM								14,0 RET
	B	6,5 CLR R ₁	6,5 CLR IR ₁	6,5 XOR r ₁ , r ₂	6,5 XOR r ₁ , IR ₂	10,5 XOR R ₂ , R ₁	10,5 XOR IR ₂ , R ₁	10,5 XOR R ₁ , IM	10,5 XOR IR ₁ , IM								16,0 IRET
	C	6,5 RRC R ₁	6,5 RRC IR ₁	12,0 LDC r ₁ , IRR ₂	18,0 LDCI IR ₁ , IRR ₂				10,5 LD r ₁ , x, R ₂								6,5 RCF
	D	6,5 SRA R ₁	6,5 SRA IR ₁	12,0 LDC r ₂ , IRR ₁	18,0 LDCI IR ₂ , IRR ₁	20,0 CALL* IRR ₁		20,0 CALL DA	10,5 LD r ₂ , x, R ₁								6,5 SCF
	E	6,5 RR R ₁	6,5 RR IR ₁		6,5 LD r ₁ , IR ₂	10,5 LD R ₂ , R ₁	10,5 LD IR ₂ , R ₁	10,5 LD R ₁ , IM	10,5 LD IR ₁ , IM								6,5 CCF
	F	8,5 SWAP R ₁	8,5 SWAP IR ₁		6,5 LD IR ₁ , R ₂		10,5 LD R ₂ , IR ₁										6,0 NOP

Bytes per Instruction


2

3

2

3

1

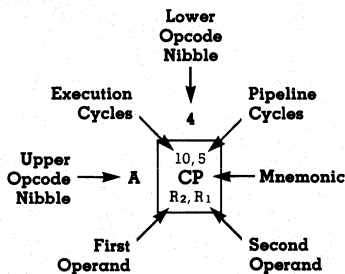

Legend:

R = 8-Bit Address
r = 4-Bit Address
R₁ or r₁ = Dst Address
R₂ or r₂ = Src Address

Sequence:

Opcode, First Operand, Second Operand

Note: The blank areas are not defined.

*2-byte instruction; fetch cycle appears as a 3-byte instruction

Absolute Maximum Ratings

Voltages on all pins with respect to GND -0.3 V to +7.0 V
 Operating Ambient Temperature See Ordering Information
 Storage Temperature -65°C to +150°C

Stresses greater than those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; operation of the device at any condition above those indicated in the operational sections of these specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Standard Test Conditions

The characteristics below apply for the following standard test conditions, unless otherwise noted. All voltages are referenced to GND. Positive current flows into the reference pin. Standard conditions are as follows:

- $+4.75\text{ V} \leq V_{CC} \leq +5.25\text{ V}$
- $GND = 0\text{ V}$
- $0^\circ\text{C} \leq T_A \leq +70^\circ\text{C}^*$

*See Ordering Information section for package temperature range and product number.




Figure 15. Test Load 1




Figure 16. Test Load 2

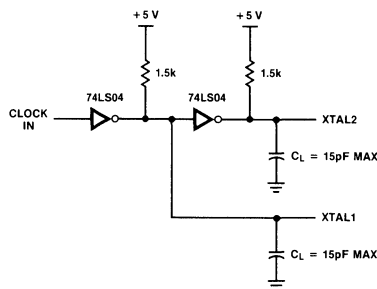


Figure 17. External Clock Interface Circuit

DC Characteristics

Symbol	Parameter	Min	Max	Unit	Condition	Notes
V_{CH}	Clock Input High Voltage	3.8	V_{CC}	V	Driven by External Clock Generator	
V_{CL}	Clock Input Low Voltage	-0.3	0.8	V	Driven by External Clock Generator	
V_{IH}	Input High Voltage	2.0	V_{CC}	V		
V_{IL}	Input Low Voltage	-0.3	0.8	V		
V_{RH}	Reset Input High Voltage	3.8	V_{CC}	V		
V_{RL}	Reset Input Low Voltage	-0.3	0.8	V		
V_{OH}	Output High Voltage	2.4		V	$I_{OH} = -250\ \mu\text{A}$	1
V_{OL}	Output Low Voltage		0.4	V	$I_{OL} = +2.0\ \text{mA}$	1
I_{IL}	Input Leakage	-10	10	μA	$0\text{ V} \leq V_{IN} \leq +5.25\text{ V}$	
I_{OL}	Output Leakage	-10	10	μA	$0\text{ V} \leq V_{IN} \leq +5.25\text{ V}$	
I_{IR}	Reset Input Current		-50	μA	$V_{CC} = +5.25\text{ V}, V_{RL} = 0\text{ V}$	
I_{CC}	V_{CC} Supply Current		180	mA		
I_{MM}	V_{MM} Supply Current		10	mA	Power Down Mode	
V_{MM}	Backup Supply Voltage	3	V_{CC}	V	Power Down	

1. For A_0 - A_{11} , $\overline{\text{MDS}}$, $\overline{\text{SYNC}}$, $\overline{\text{SCLK}}$ and $\overline{\text{IACK}}$ on the Z8612 version, $I_{OH} = -100\ \mu\text{A}$ and $I_{OL} = 1.0\ \text{mA}$.

**External I/O
or Memory
Read and
Write Timing**

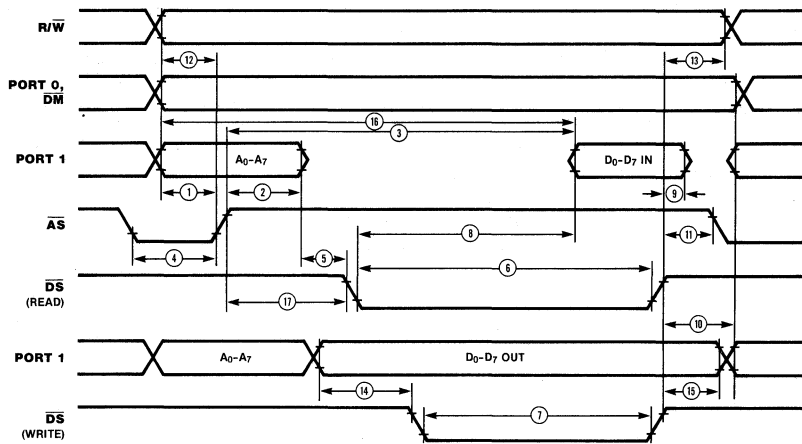


Figure 18. External I/O or Memory Read/Write

No.	Symbol	Parameter	Z8611/2/3		Z8611/2/3-12		Notes**†
			Min	Max	Min	Max	
1	TdA(AS)	Address Valid to \overline{AS} ↑ Delay	50		35		1,2,3
2	TdAS(A)	\overline{AS} ↑ to Address Float Delay	70		45		1,2,3
3	TdAS(DR)	\overline{AS} ↑ to Read Data Required Valid		360		220	1,2,3,4
4	TwAS	\overline{AS} Low Width	80		55		1,2,3
5	TdAz(DS)	Address Float to \overline{DS} ↓	0		0		1
6	TwDSR	\overline{DS} (Read) Low Width	250		185		1,2,3,4
7	TwDSW	\overline{DS} (Write) Low Width	160		110		1,2,3,4
8	TdDSR(DR)	\overline{DS} ↓ to Read Data Required Valid		200		130	1,2,3,4
9	ThDR(DS)	Read Data to \overline{DS} ↑ Hold Time	0		0		1
10	TdDS(A)	\overline{DS} ↑ to Address Active Delay	70		45		1,2,3
11	TdDS(AS)	\overline{DS} ↑ to \overline{AS} ↓ Delay	70		55		1,2,3
12	TdR/W(AS)	R/ \overline{W} Valid to \overline{AS} ↑ Delay	50		30		1,2,3
13	TdDS(R/W)	\overline{DS} ↑ to R/ \overline{W} Not Valid	60		35		1,2,3
14	TdDW(DSW)	Write Data Valid to \overline{DS} (Write) ↓ Delay	50		35		1,2,3
15	TdDS(DW)	\overline{DS} ↑ to Write Data Not Valid Delay	70		45		1,2,3
16	TdA(DR)	Address Valid to Read Data Required Valid		410		255	1,2,3,4
17	TdAS(DS)	\overline{AS} ↑ to \overline{DS} ↓ Delay	80		55		1,2,3

NOTES:

1. Test Load 1
2. Timing numbers given are for minimum TpC.
3. Also see clock cycle time dependent characteristics table.
4. When using extended memory timing add 2 TpC.

5. All timing references use 2.0 V for a logic "1" and 0.8 V for a logic "0".
- * All units in nanoseconds (ns).
- † Timings are preliminary and subject to change.

**Additional
Timing
Table**

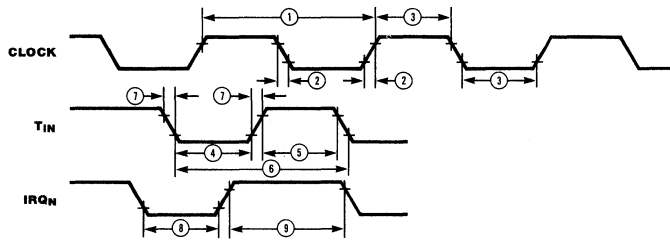


Figure 19. Additional Timing

No.	Symbol	Parameter	Z8611/2/3		Z8611/2/3-12		Notes*†
			Min	Max	Min	Max	
1	TpC	Input Clock Period	125	1000	83	1000	1
2	TrC,TfC	Clock Input Rise And Fall Times		25		15	1
3	TwC	Input Clock Width			26		1
4	TwTinL	Timer Input Low Width	100		70		2
5	TwTinH	Timer Input High Width	3TpC		3TpC		2
6	TpTin	Timer Input Period	$\frac{TpC}{8}$		$\frac{TpC}{8}$		2
7	TrTin,TfTin	Timer Input Rise And Fall Times		100		100	2
8	TwIL	Interrupt Request Input Low Time	100		70		2,3
9	TwIH	Interrupt Request Input High Time	3TpC		3TpC		2,3

NOTES:

- Clock timing references uses 3.8 V for a logic "1" and 0.8 V for a logic "0".
 - Timing reference uses 2.0 V for a logic "1" and 0.8 V for a logic "0".
 - Interrupt request via Port 3.
- * Units in nanoseconds (ns).
† Timings are preliminary and subject to change.

**Z8612, Z8613
Memory Port
Timing**




Figure 20. Memory Port Timing

No.	Symbol	Parameter	Z8611/2/3		Z8611/2/3-12		Notes*
			Min	Max	Min	Max	
1	TdA(DI)	Address Valid to Data Input Delay		460		320	1,2
2	ThDI(A)	Data In Hold Time	0		0		1

NOTES:

- Test Load 2
 - This is a Clock-Cycle-Dependent parameter. For clock frequencies other than the maximum, use the following formula:
 Z8611/2/3 = 5 TpC - 165
 Z8611/2/3-12 = 5 TpC - 95
- * Units are nanoseconds unless otherwise specified; timings are preliminary and subject to change.

Handshake Timing

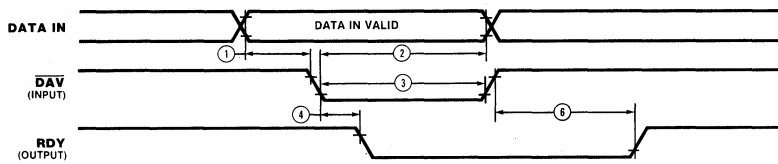


Figure 21a. Input Handshake

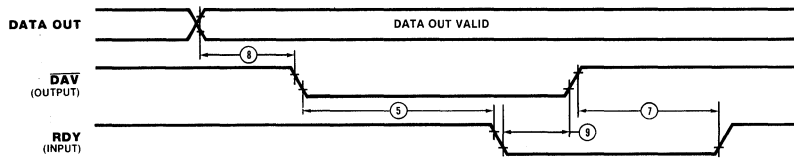


Figure 21b. Output Handshake

No.	Symbol	Parameter	Z8611/2/3		Z8611/2/3-12		Notes*†
			Min	Max	Min	Max	
1	TsDI(DAV)	Data In Setup Time	0		0		
2	ThDI(DAV)	Data In Hold Time	230		160		
3	TwDAV	Data Available Width	175		120		
4	TdDAV↓(RDY)	\overline{DAV} ↓ Input to RDY ↓ Delay		175		120	1,2
5	TdDAV↑(RDY)	\overline{DAV} ↓ Output to RDY ↓ Delay	0		0		1,3
6	TdDAV↑(RDY)	\overline{DAV} ↑ Input to RDY ↑ Delay		175		120	1,2
7	TdDAV↑(RDY)	\overline{DAV} ↑ Output to RDY ↑ Delay	0		0		1,3
8	TdDO(DAV)	Data Out to \overline{DAV} ↓ Delay	50		30		1
9	TdRDY(DAV)	Rdy ↓ Input to \overline{DAV} ↑ Delay	0	200	0	140	1

NOTES:

1. Test load 1
2. Input handshake
3. Output handshake
4. All timing references use 2.0 V for a logic "1" and 0.8 V for a logic "0".

* Units in nanoseconds (ns).

† Timings are preliminary and subject to change.


Clock-Cycle-Time-Dependent Characteristics	Number	Symbol	Z8611/2/3	Z8611/2/3-12
			Equation	Equation
	1	TdA(AS)	TpC-75	TpC-50
	2	TdAS(A)	TpC-55	TpC-40
	3	TdAS(DR)	4TpC-140*	4TpC-110*
	4	TwAS	TpC-45	TpC-30
	6	TwDSR	3TpC-125*	3TpC-65*
	7	TwDSW	2TpC-90*	2TpC-55*
	8	TdDSR(DR)	3TpC-175*	3TpC-120*
	10	Td(DS)A	TpC-55	TpC-40
	11	TdDS(AS)	TpC-55	TpC-30
	12	TdR/W(AS)	TpC-75	TpC-55
	13	TdDS(R/W)	TpC-65	TpC-50
	14	TdDW(DSW)	TpC-75	TpC-50
	15	TdDS(DW)	TpC-55	TpC-40
	16	TdA(DR)	5TpC-215*	5TpC-160*
	17	TdAS(DS)	TpC-45	TpC-30

* Add 2TpC when using extended memory timing

Ordering Information	Product Number	Package/Temp	Speed	Description	Product Number	Package/Temp	Speed	Description
	Z8611	CE	8.0 MHz	Z8 MCU (4K ROM, 40-pin)	Z8612	CE	8.0 MHz	Z8 MCU (4K XROM, 64-pin)
	Z8611	CS	8.0 MHz	Same as above	Z8612	CS	8.0 MHz	Same as above
	Z8611	DE	8.0 MHz	Same as above	Z8612	DE	8.0 MHz	Same as above
	Z8611	DS	8.0 MHz	Same as above	Z8612	DS	8.0 MHz	Same as above
	Z8611	PE	8.0 MHz	Same as above	Z8612	PE	8.0 MHz	Same as above
	Z8611	PS	8.0 MHz	Same as above	Z8612	PS	8.0 MHz	Same as above
	Z8611-12	CE	12.0 MHz	Z8 MCU (4K ROM, 40-pin)	Z8612-12	CE	12.0 MHz	Z8 MCU (4K XROM, 64-pin)
	Z8611-12	CS	12.0 MHz	Same as above	Z8612-12	CS	12.0 MHz	Same as above
	Z8611-12	DE	12.0 MHz	Same as above	Z8612-12	DE	12.0 MHz	Same as above
	Z8611-12	DS	12.0 MHz	Same as above	Z8612-12	DS	12.0 MHz	Same as above
	Z8611-12	PE	12.0 MHz	Same as above	Z8612-12	PE	12.0 MHz	Same as above
	Z8611-12	PS	12.0 MHz	Same as above	Z8612-12	PS	12.0 MHz	Same as above
	Z8611	LS	8.0 MHz	Z8 MCU (4K ROM, 44-pin LCC)	Z8613	RS	8.0 MHz	Z8 MCU (4K XROM, Prototyping Device, (40-pin)
	Z8611-12	LS	12.0 MHz	Same as above	Z8613-12	RS	12.0 MHz	Same as above

NOTES: C = Ceramic, D = Cerdip, L = Leadless Chip Carrier (LCC) P = Plastic, R = Prototyping Device; E = -40°C to +70°85C, S = 0°C to +70°C.


Package Dimensions

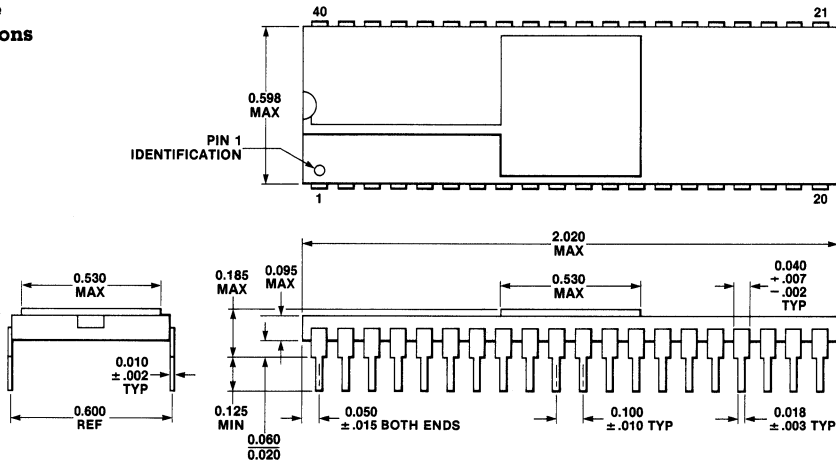


40-Pin Ceramic Package

NOTE: Package deminsions are given in inches. To convert to milimeters, multiply by 25.4.

**Package
Dimensions**
(Continued)


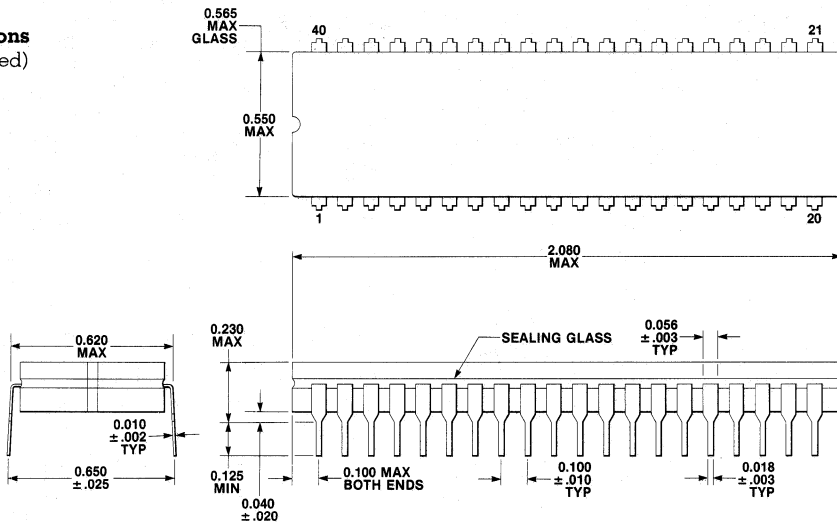


40-Pin Cerdip Package

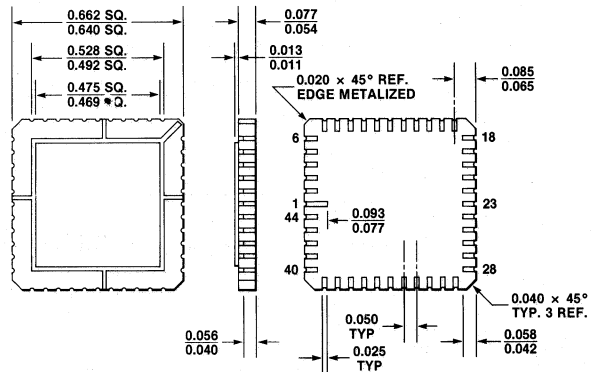


44-Pin Leadless Package

**Package
Dimensions**
(Continued)

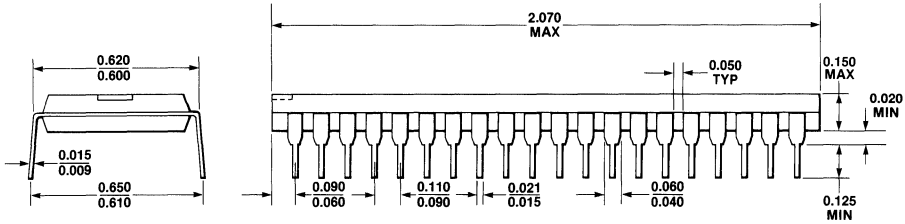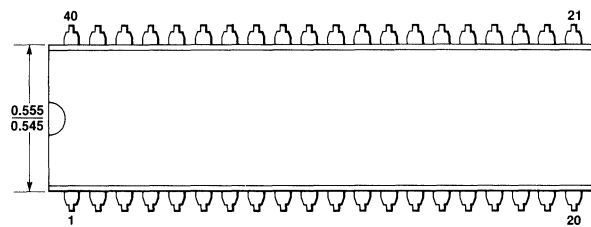

40-Pin Plastic Package

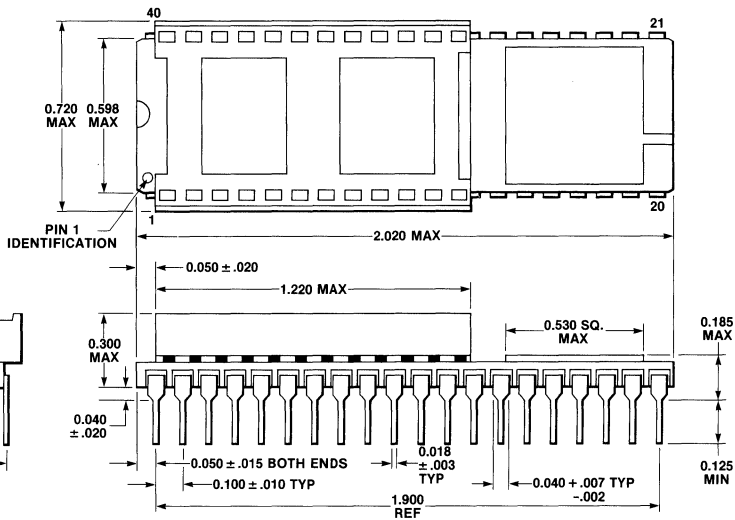

40-Pin Protopack Package

Notes

**Zilog
Sales
Offices****West**

Sales & Technical Center
Zilog, Incorporated
1315 Dell Avenue
Campbell, CA 95008
Phone: (408) 370-8120
TWX: 910-338-7621

Sales & Technical Center
Zilog, Incorporated
18023 Sky Park Circle
Suite J
Irvine, CA 92714
Phone: (714) 549-2891
TWX: 910-595-2803

Sales & Technical Center
Zilog, Incorporated
15643 Sherman Way
Suite 430
Van Nuys, CA 91406
Phone: (213) 989-7485
TWX: 910-495-1765

Sales & Technical Center
Zilog, Incorporated
1750 112th Ave. N.E.
Suite D161
Bellevue, WA 98004
Phone: (206) 454-5597

Midwest

Sales & Technical Center
Zilog, Incorporated
951 North Plum Grove Road
Suite F
Schaumburg, IL 60195
Phone: (312) 885-8080
TWX: 910-291-1064

Sales & Technical Center
Zilog, Incorporated
28349 Chagrin Blvd.
Suite 109
Woodmere, OH 44122
Phone: (216) 831-7040
FAX: 216-831-2957

South

Sales & Technical Center
Zilog, Incorporated
4851 Keller Springs Road,
Suite 211
Dallas, TX 75248
Phone: (214) 931-9090
TWX: 910-860-5850

Zilog, Incorporated
7113 Burnet Rd.
Suite 207
Austin, TX 78757
Phone: (512) 453-3216

East

Sales & Technical Center
Zilog, Incorporated
Corporate Place
99 South Bedford St.
Burlington, MA 01803
Phone: (617) 273-4222
TWX: 710-332-1726

Sales & Technical Center
Zilog, Incorporated
240 Cedar Knolls Rd.
Cedar Knolls, NJ 07927
Phone: (201) 540-1671

Technical Center
Zilog, Incorporated
3300 Buckeye Rd.
Suite 401
Atlanta, GA 30341
Phone: (404) 451-8425

Sales & Technical Center
Zilog, Incorporated
1442 U.S. Hwy 19 South
Suite 135
Clearwater, FL 33516
Phone: (813) 535-5571

Zilog, Inc.
613-B Pitt St.
Cornwall, Ontario
Canada K6J 3R8
Phone: (613) 938-1121

United Kingdom

Zilog (U.K.) Limited
Zilog House
43-53 Moorbridge Road
Maidenhead
Berkshire, SL6 8PL England
Phone: 0628-39200
Telex: 848609

France

Zilog, Incorporated
Tour Europe
Cedex 7
92080 Paris La Defense
France
Phone: (1) 778-14-33
Telex: 611445F

West Germany

Zilog GmbH
Eschenstrasse 8
D-8028 TAUFKIRCHEN
Munich, West Germany
Phone: 89-612-6046
Telex: 529110 Zilog d.

Japan

Zilog, Japan K.K.
Konparu Bldg. 5F
2-8 Akasaka 4-Chome
Minato-Ku, Tokyo 107
Japan
Phone: (81) (03) 587-0528
Telex: 2422024 A/B: Zilog J