

TRANSFORMERS FOR DIGITAL AUDIO DATA TRANSMISSION


For Use with Crystal Semiconductor's CS8401, CS8402 for ICs




- Operating transmission rates: 1 to 7 Mbps
- Controlled rise time: 25 nsec max
- High isolation voltage: 2 kV min

Electrical Specifications @ 25°C — Operating Temperature 0°C to 70°C





| Part Number | Turns Ratio (±5%) | Primary Inductance (mH ±20%) | L _L (μH) MAX | Rise Time (nsec) MAX | ET (V-μsec) MAX | Isolation (Vrms) MIN | Bandwidth (100 KHz- 55 MHz) TYP | Return Loss (100 kHz-10MHz) MIN | Schematic |
|-------------|-------------------|------------------------------|-------------------------|----------------------|-----------------|----------------------|---------------------------------|---------------------------------|-----------|
| PE-65612 | 1:1 | 2.5 | .50 | 25 | 20 | 2000 | 3 dB | 22 dB | THT |
| PE-65812 | 1:1 | 2.5 | .50 | 25 | 20 | 2000 | 3 dB | 22 dB | SMT |

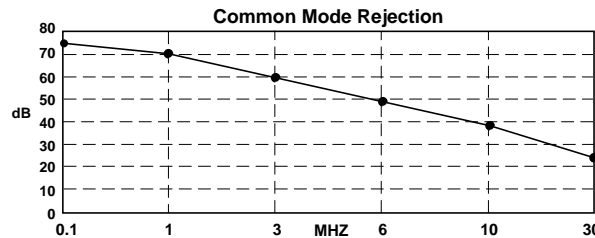

Mechanicals

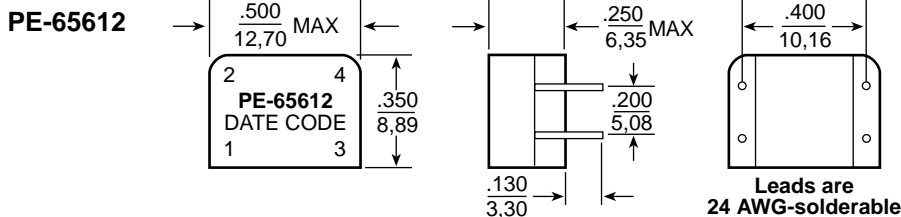

Schematics

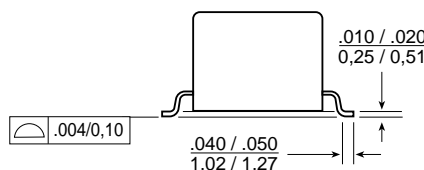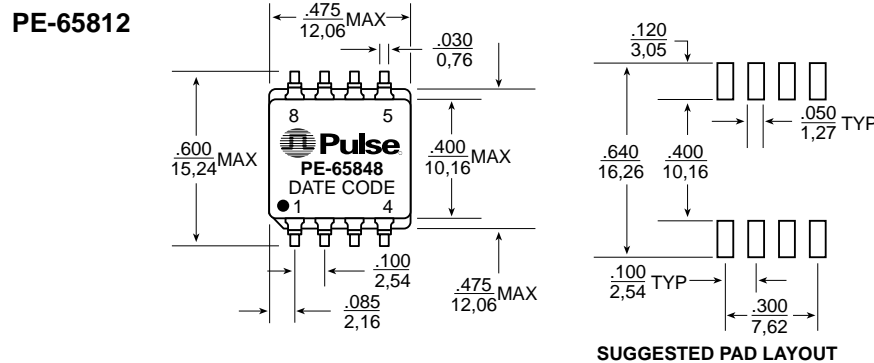

| | PE-65612 | PE-65812 |
|-------------|--|--------------------|
| Weight |1.2 grams |2.0 grams |
| Tape & Reel |NA |250/reel |
| Tube |60/tube |30/tube |
| Dimensions: | Inches / mm | |
| | Unless otherwise specified all tolerances are ±.010 / 0,25 | |

TRANSFORMERS FOR DIGITAL AUDIO DATA TRANSMISSION

For Use with Crystal Semiconductor's CS8401, CS8402 for ICs



Application

These transformers have been designed for use at the interface between line driver and receiver and the interconnecting medium in Digital Audio Data Transmission Systems according to AES 3-199X or IEC 958. In such systems, two channels of periodically sampled and uniformly quantized audio signals are transmitted on a single shielded twisted pair.

The electrical parameters of the interface are based on those of CCITT V.11 or balanced voltage digital circuits which allow signal transmission up to a few hundred meters.

Applicable Documents


AES 3-1985 (ANSI S4.40-1985), AES 3-199XDraft, IEC 958, CP-340, EBU 3250

The isolation transformers are essential in improving the balance of the transmitter and the receiver circuitry, and reducing common mode noise and EMI.

These transformers are recommended for use with the Crystal Semiconductor CS8401/2 "Digital Audio Interface Transmit Device."

The schematic below represents an implementation of transmit and receive circuits using isolation transformers at both ends. Equalization in the receiver may permit to increase the length of the interconnecting cable.

Application Circuit

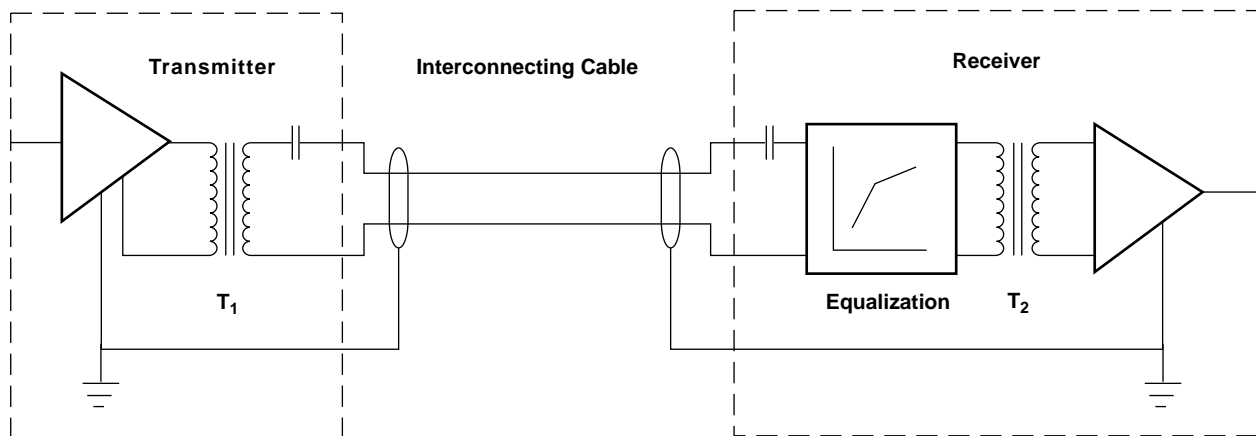

T₁, T₂: PE-65612 or PE-65812

For More Information :

Corporate

12220 World Trade Drive
San Diego, CA 92128
Tel: 619 674 8100
FAX: 619 674 8262
<http://www.pulseeng.com>
Quick-Facts: 619 674 9672

Europe

Dunmore Road
Tuam
County Galway
Ireland
Tel: 353 93 24107
FAX: 353 93 24459

Asia

Block 3027
Ubi Road 1
#03-120
Singapore 408720
Tel: 65 741 5227
FAX: 65 741 3013

Distributor

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. CS8401 and CS8402 are trademarks of Crystal Semiconductor Corporation.