


Agilent E1485C VXI Digital Signal Processor

Technical Specifications

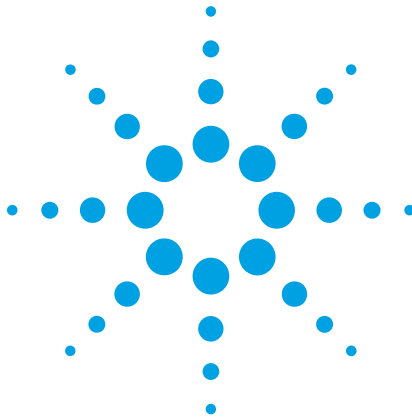

Agilent E1485C

- Get advanced control capability with 40 MHz Motorola 68EC030 32-Bit Processor
- Use powerful processing capability using fixed or floating point DSP
- Use up to 5 DSPs per module to increase DSP speed
- Get up to 64 MB of RAM for program and data storage
- Use the 35635T Programming Toolkit to speed your application software development
- Uses one C-size module slot
- Message-based commander

Specifications describe warranted performance for the system configuration listed. Supplemental characteristics identified as “typical” or “characteristic,” provide useful information by giving non-warranted performance parameters.

The Agilent E1485C signal processing module is a high-performance measurement controller and digital signal processor. It combines a 32-bit microprocessor running at 40 MHz with state-of-the-art digital signal processors and user-written, downloaded software to achieve measurement processing performance previously seen only in custom hardware systems.



Agilent Technologies

Innovating the HP Way

Central processing unit (CPU)

High-speed measurement loops and multiple DSP processing start with a high-performance CPU. In the E1485C, the CPU is a Motorola 68EC030 running at 40 MHz. It manages communication with the host, initializes and monitors DSP operations and data transfers, and controls other VXI modules. CPU memory size is 16 MB, expandable to 64 MB at the time of purchase or later.

Digital signal processors (DSP)

You can configure the E1485C to meet your signal processing needs.

For FFT speed and computational dynamic range, the E1485C comes standard with a 32-bit Motorola 96002 floating-point DSP assembly. This assembly can compute a 1,024-point, complex FFT in under 2 ms. For more speed, up to four DSP assemblies can be added to the E1485C (Opt 104).

All the DSP assemblies are retrofitable.


Fast internal transfer bus (FIT)

The time to transfer data to and from a DSP can be a significant portion of the overall processing time, particularly in multiple DSP configurations. The E1485C has a fast internal transfer bus designed to speed data transfer. It moves data between the CPU, the DSP assemblies, and the high-speed local bus at rates as high as 20 MB/s.

High speed local bus

In addition to standard VXI backplane data transfers, the E1485C can transfer data over a high-speed local bus. Agilent has implemented a high-speed module-to-module transfer protocol using the VXI P2 connector. This local bus allows data transfers between adjacent modules at rates as high as 100 MB/s. Complex transfer types such as an append mode are supported, allowing multiple modules to send data to one E1485C.

**Agilent E1485C
Functional
Block Diagram**

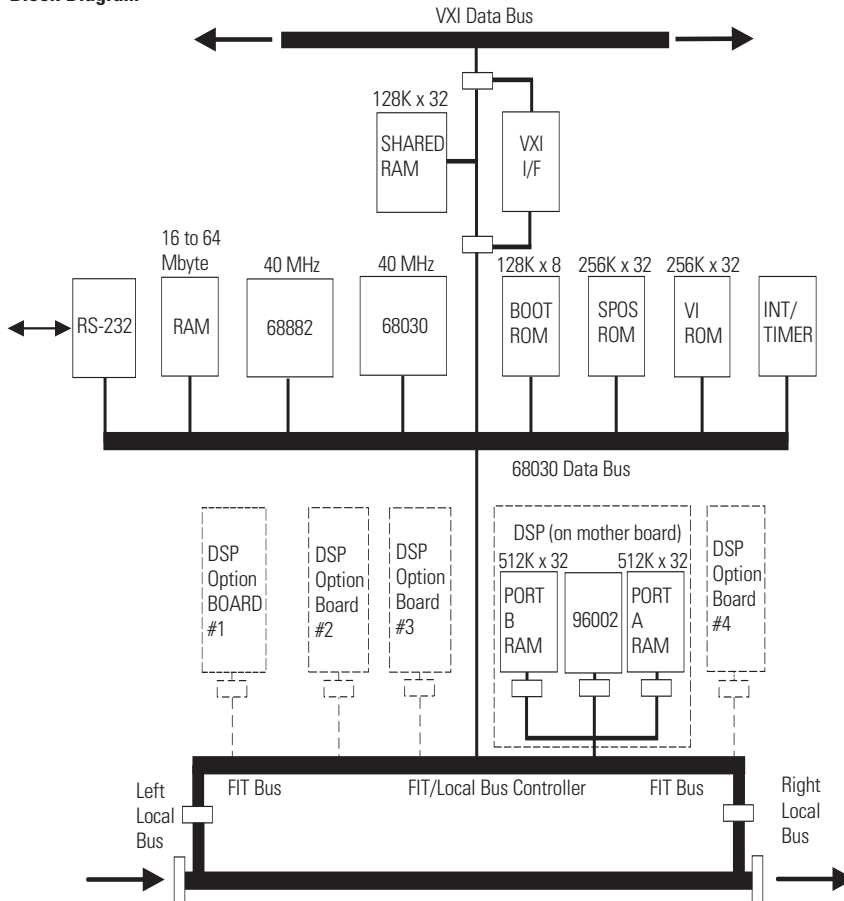

Operating Characteristics

Downloaded software

The E1485C is controlled through user-written, downloaded software running on Agilent's Signal Processor Operating System (SPOS). This operating system contains all the I/O drivers necessary to interface to the VXI backplane, the local bus, the DSP assemblies, and other system functions, such as programmable timers.

The user develops the downloadable application software for the E1485C on a host workstation using the E1485C Programmers Toolkit (35635T). This software development environment and in-factory training class provides system integrators and other programmers experienced in UNIX®, ANSI C, and DSP programming the tools they need to develop high-performance code. The tools include VXI I/O functions, host communication functions, DSP control, optimized data transfers, timer operations, software signaling, math functions, and debugging. DSP libraries for the 96002 are included for standard DSP operations like FFT, etc. Advanced algorithms can be developed using the Motorola DSP development software and then linked to the Toolkit code.

When the application is debugged and ready to go, the code can be loaded in the application's 1 MB FLASH ROM on board the E1485C. This allows the E1485C to power up, executing the application.

CPU	
Operating system	Motorola 68EC030, 40 MHz
Floating point unit	Motorola 68882, 40 MHz
RAM	16 MB (upgradable to 32, 64)

VXI Interface	
Message-Based Commander/Servant Programmable Interrupt Handler Supports A16/A24, D32/D16/D08 (E0) Master/Slave	
Shared RAM	128K x 32 static RAM

Data Transfer	
FIT bus cycle time	150 ns (32 bits every 150 ns)
FIT transfer rate	6.67 MHz
Local bus passthrough rate	Up to 100 MB/s
Local bus to DSP rate	16 MB/s to 96000 RAM 26.6 MB/s in some situations
Motorola 96002 DSP	
Clock speed	40 MHz
Operation rate	60 MFLOPS
DSP Memory	2 Banks, A and B of 32 x 512k (4 MB)
FFT speed (1,024 complex)	< 2 ms (includes windowing and bit reversal)

DSP Functions Supported (35635T)	
These functions operate on blocks of data	FFT (forward and inverse, real and complex, with windowing) Power Spectrum Block Math Functions (+, -, *) Block Scale and Offset Block Constant Conjugate Zoom Filter Random Block Histogram

Power Requirements		
	dc	dynamic current
+5V	2.70A ¹	0.90A ¹
+12V	2	2
-12V	0	0
+24V	0	0
-24V	0	0
-5.2V	0.80A	0.02A
-2V	0.21A	0.20A

UNIX® is a registered trademark in the United States and other countries, licensed exclusively through X/Open Company Limited.

¹ Add 0.70 Amp DC and 0.02 Amp Dynamic for each option 104.

² The E1485C may consume up to 120 mA (40 mA typical) of +12V while programming.

Ordering Information

Agilent E1485A	Digital Signal Processor
Opt ANC	Increase RAM memory to 32 MB
Opt ANE	Increase RAM memory to 64 MB
Opt 104	Add one 96002 DSP card
Opt OB1	Extra Manual
Opt OB0	Delete Manual
Opt OR3	3-year Uptime Support Loaner
Opt W01	Warranty conversion to One-year on-site
Agilent 35635T	Programmers Toolkit

Warranty Information

The E1485C comes with a three-year warranty. During that period, the unit will either be replaced or repaired, at Agilent's option, and returned to the customer without charge. There is an option available at extra cost which extends the repair support to five years.

Related Agilent Literature

Agilent 35635T Programmers Toolkit
Product Overview
5966-2277E

www.agilent.com/find/data_acq

Agilent Technologies' Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

Our Promise

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you use Agilent equipment, we can verify that it works properly, help with product operation, and provide basic measurement assistance for the use of specified capabilities, at no extra cost upon request. Many self-help tools are available.

Your Advantage

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and on-site education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

For More Assistance with Your Test & Measurement Needs go to

www.agilent.com/find/assist

Or contact the test and measurement experts at Agilent Technologies
(During normal business hours)

United States:
(tel) 1 800 452 4844

Latin America:
(tel) (305) 267 4245
(fax) (305) 267 4286

Canada:
(tel) 1 877 894 4414
(fax) (905) 206 4120

Australia:
(tel) 1 800 629 485
(fax) (61 3) 9272 0749

Europe:
(tel) (31 20) 547 2323
(fax) (31 20) 547 2390

New Zealand:
(tel) 0 800 738 378
(fax) 64 4 495 8950

Japan:
(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Asia Pacific:
(tel) (852) 3197 7777
(fax) (852) 2506 9284

Product specifications and descriptions in this document subject to change without notice.
Copyright © 1996, 1997, 2000 Agilent Technologies
Printed in U.S.A. 5/00
5965-9821E



Agilent Technologies

Innovating the HP Way