

December 2000  
13WC-1200A-WWEN

Prepared by OS Integration  
Engineering

Compaq Computer Corporation

## Contents

### Setting up a Red Hat 6.2

### Linux or later Operating

### System Image .....3

Prerequisites for Red Hat 6.2

Linux or later .....3

### Prerequisites and minimum

### requirements .....3

Preparing for a Red Hat

Linux PXE Server .....4

Setting up the Linux PXE

server .....4

Software Installation .....5

Launching the PXE Image

for Red Hat Linux 6.2 or later .....7

### ProLiant Health Driver for

### Linux .....7

### Appendix - Web Resources .....8

# Configuring a Pre-execution Environment (PXE) using Red Hat Linux 6.2 or later on Compaq ProLiant Servers

*Abstract:* This integration note discusses configuring a Pre-execution Environment (PXE) using Red Hat Linux 6.2 or later on Compaq ProLiant Servers.

The following topics are covered in detail throughout this integration note:

- Setting up a Red Hat 6.2 Linux operating system including the prerequisites and minimum requirements
- Preparing the Red Hat 6.2 or later Linux server
- Installing the Red Hat 6.2 or later software
- Launching the PXE for Red Hat 6.2 Linux or later

The Appendix has a listing of Compaq web resources and other helpful websites for the Linux operating system.

In addition to this integration note and for current information about Linux visit <http://www.compaq.com/products/software/linux/>.

Help us improve our technical communication. Let us know what you think about the technical information in this document. Your feedback is valuable and will help us structure future communications. Please send your comments to: [OSIntegrationFeedback@compaq.com](mailto:OSIntegrationFeedback@compaq.com)

## Notice

©2000 Compaq Computer Corporation.

Aero, ActiveAnswers, Compaq, the Compaq logo, Compaq Insight Manager, Himalaya, NetFlex, NonStop, ProLiant, ROMPaq, SmartStart, StorageWorks, Tandem, BackPaq, CompaqCare (design), Contura, Deskpro, DirectPlus, LicensePaq, LTE, MiniStation, PageMarq, PaqFax, PaqRap Presario, ProLinea, QVision, QuickBack, QuickFind, RemotePaq, , SilentCool, SLT, SmartStation, SpeedPaq, Systempro, Systempro/LT, TechPaq, and TwinTray are registered United States Patent and Trademark Office.

Armada, Cruiser, Concerto, EasyPoint, EZ Help, FirstPaq, Innovate logo,, LTE Elite, MaxLight, MultiLock, Net1, PageMate, QuickBlank, QuickChoice, QuickLock, ProSignia, SoftPaq, SolutionPaq, Systempro/XL, UltraView, Vocalyst, Wonder Tools logo in black/white and color, and Compaq PC Card Solution logo are trademarks and/or service marks of Compaq Computer Corporation.

Fastart, Netelligent, and TaskSmart are trademarks and/or service marks of Compaq Information Technologies Group, L.P. in the U.S. and/or other countries.

Active Directory, Microsoft, Windows 95, Windows 98, Windows, Windows NT, Windows NT Server and Workstation, Windows NT Enterprise Edition, Microsoft SQL Server for Windows NT are trademarks and/or registered trademarks of Microsoft Corporation.

Pentium, Xeon, Pentium II Xeon, and Pentium III Xeon are registered trademarks of Intel Corporation.

UNIX is a registered trademark of The Open Group.

NetWare, GroupWise, Managewise, Novell Storage Services, and Novell are registered trademarks and intraNetWare, Border Manager, Console One, Z.E.N.works, NDS, and Novell Directory Services are trademarks of Novell, Inc.

SCO, UnixWare, OpenServer 5, UnixWare 7, Project Monterrey, and Tarantella are registered trademarks of the Santa Cruz Operation.

Adobe, Acrobat, and the Acrobat logo are trademarks of Adobe Systems, Inc.

Other product names mentioned herein may be trademarks and/or registered trademarks of their respective companies.

The information in this publication is subject to change without notice and is provided "AS IS" WITHOUT WARRANTY OF ANY KIND. THE ENTIRE RISK ARISING OUT OF THE USE OF THIS INFORMATION REMAINS WITH RECIPIENT. IN NO EVENT SHALL COMPAQ BE LIABLE FOR ANY DIRECT, CONSEQUENTIAL, INCIDENTAL, SPECIAL, PUNITIVE OR OTHER DAMAGES WHATSOEVER (INCLUDING WITHOUT LIMITATION, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION OR LOSS OF BUSINESS INFORMATION), EVEN IF COMPAQ HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

The limited warranties for Compaq products are exclusively set forth in the documentation accompanying such products. Nothing herein should be construed as constituting a further or additional warranty.

This publication does not constitute an endorsement of the product or products that were tested. The configuration or configurations tested or described may or may not be the only available solution. This test is not a determination of product quality or correctness, nor does it ensure compliance with any federal state or local requirements.

Configuring a Pre-execution Environment (PXE) using Red Hat Linux on Compaq ProLiant Servers  
Integration Notes prepared by OS Integration Engineering

First Edition (December 2000)

Document Number 13WC-1200A-WWEN

## Setting up a Red Hat 6.2 Linux or later Operating System Image

Red Hat Linux and many other Linux distributions now support the Pre-Execution Environment (PXE). PXE can be used to install the operating system, or create a diskless client. Red Hat 6.2 or later Linux is the distribution package this section describes for setting up a PXE.

This link downloads original, older documentation for Red Hat 5.x produced by Intel:  
<ftp://download.intel.com/ial/wfm/pxesdklinux.pdf>

Additional information on the Linux operating system is also available here at  
<http://www.linuxdocs.org>.

### Prerequisites for Red Hat 6.2 Linux or later

A separate DHCP or BOOTP server must be running on the same network if using Red Hat 6.2 or later Linux. The operating system is not an issue; any operating system will suffice. The Linux PXE service cannot communicate to the DHCP service on the same server, hence the need for a separate machine. The Linux PXE server requires at least 4 GB (gigabyte) of available hard disk space.

Due to the way the client interacts with the server, setting up a Red Hat Linux 6.x PXE server requires downloading multiple files. The Red Hat source package contains the PXE server and all the code bits necessary for Linux to boot from a boot disk image on a Linux PXE server.

If you need more information on setting up and using Linux, browse the documentation at the Red Hat website <http://www.redhat.com/index.html> or <http://www.linuxdocs.org>.

## Prerequisites and minimum requirements

PXE can be used to setup any operating system. If using Red Hat 6.2 or later Linux, a separate DHCP or BOOTP server must be running on the same network segment. See Table 1 for server hardware machine requirements for running Red Hat 6.2 or later Linux.

**Table 1. Server hardware requirements**

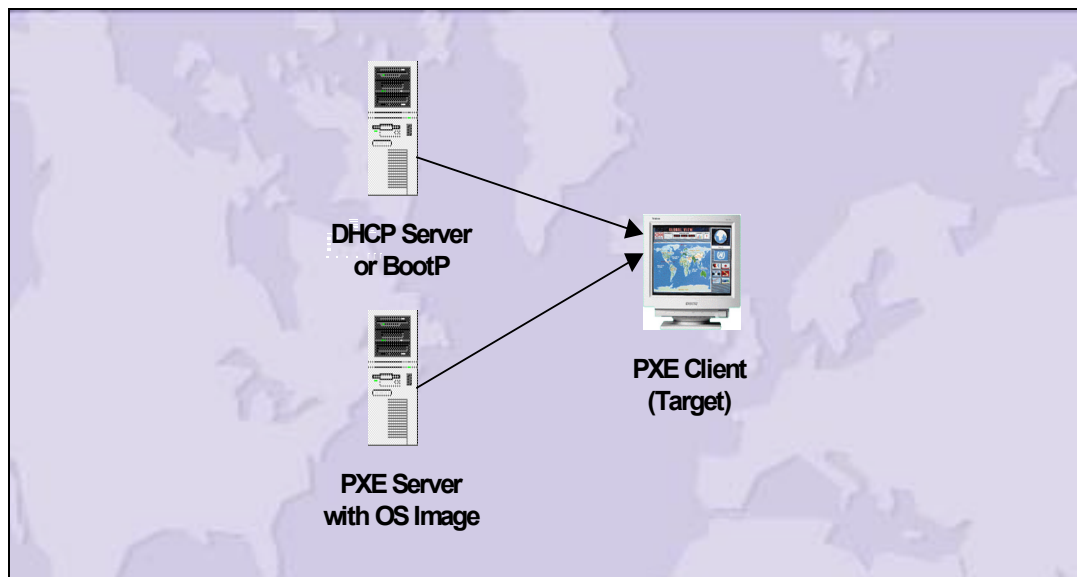
Red Hat 6.x Linux Server
Pentium or Pentium II 200-MHz or faster processor (Pentium 166 minimum).
64 megabytes (MB) of RAM (96-128 MB preferred).
At least 4-gigabyte (GB) free hard drive space
10 Mb (megabits)/second network adapter (100 Mb megabits/second recommended).
CD-ROM drive.
A separate DHCP or BOOTP server must be running on the same network segment.

See Table 2 for client machine requirements for Red Hat 6.2 or later Linux.

**Table 2. Client machine requirements**

<b>Red Hat 6.x Linux</b>
PXE-enabled personal computer with a minimum PXE revision of NetPC.99c or later and a minimum of 64 MB RAM.
System must be setup to boot from the network before HDD.
Active DHCP server on the network so the client can acquire an IP address.

Figure 1 shows a typical setup for Red Hat 6.2. or later Linux including the servers and the client target machine.

**Figure 1. Typical PXE setup for Red Hat 6.2 or later Linux**

## Preparing for a Red Hat Linux PXE Server

Before proceeding with the PXE server setup be sure to install Red Hat Linux 6.2 or later with the following aspects.

- FTP support
- C and C++ Development
- Static IP Address

## Setting up the Linux PXE server

After installing a static IP address, allowing for both FTP support and software development support, setup the PXE server by following the steps detailed in the following sections.

## Software Installation

The following instructions specify paths and filenames that should be correct in most cases. It is possible, with different versions of RedHat and different installations that the user will have to adjust the directions for these differences.

1. Install the kernel source and PXE software by doing the following.

```
Type [mount /dev/cdrom /mnt/cdrom]
      [rpm -Uvh /mnt/cdrom/RedHat/RPMS/kernel*]
      [rpm -Uvh /mnt/cdrom/RedHat/RPMS/pxe*]
      [umount /mnt/cdrom]
```

---

**Note:** Ignore the error messages regarding kernel packages already being installed.

---

2. Add the following lines to /etc/services:

```
Type [mtftp 1759/udp]
      [pxe 67/udp]
      [pxe 4011/udp]
```

3. Change this line in /etc/inetd.conf:

```
#tftp dgram udp wait root /usr/sbin/tcpd in.tftpd
```

To these lines:

```
Type [tftp dgram udp wait root /usr/sbin/tcpd in.tftpd/tftpboot]
      [mtftp dgram udp wait root /usr/sbin/tcpd in.mtftpd]
      [/tftpboot]
```

4. Modify the /etc/rc.d/init.d/inet file to enable the PXE daemon on restart. Look for this line:

```
daemon inetd
```

Add this line immediately after it (do not add “daemon” onto the front of pxe):

```
Type [pxe]
```

Add these lines to the end of your /etc/rc.d/rc.local file:

```
Type [route add -host 255.255.255.255 eth0]
      [route add -net 224.0.0.0 netmask 224.0.0.0 eth0]
```

5. Test the PXE server by restarting the server. Upon restart, boot up a PXE enabled client.

The client’s PXE boot process should receive an IP address from DHCP.

6. Press **F8** when you see the following:

```
Press <F8> to view menu...
```

```
A PXE boot menu displays stating
Local Boot
Linux Install
```

7. Select Linux Install and press <Enter>. You should see the following text appear on the screen.

```
MD w.x.y.z
BOOT SERVER IP: w.x.y.z
MTFTP..
Intel Linux NBP, PXE-2.0 Beta-x (build nnn)
Downloading linux kernel image
PXE-T01: File not found.
```

If you see this message, you configured the PXE server and TFTP/MTFTP daemons correctly. The next step is to put the proper boot images in place.

8. Insert the RedHat CD-ROM
9. Insert an erasable floppy diskette
10. Perform the following to copy the boot images:

```
Type      [cd /usr/src]
           [tar -xzf redhat/SOURCES/pxe-linux.tar.gz]
           [cd /tftpboot/X86PC/UNDI/linux-install]
           [cp /usr/src/pxe-linux/server/linux.0 ./]
```

```
Type      [mount /dev/cdrom /mnt/cdrom]
           [cd /mnt/cdrom/images/]
           [dd if=bootnet.img of=/dev/fd0 bs=72k]
           [umount /mnt/cdrom]
           [mount /dev/fd0 /mnt/floppy]
           [cd /tftpboot/X86PC/UNDI/linux-install]
           [cp /mnt/floppy/vmlinuz ./linux.1]
           [cp /mnt/floppy/initrd.img ./linux.2]
           [umount /mnt/floppy]
```

At this point, the client can boot Linux.

The following instructions are necessary to complete setup of the PXE Installation for Red Hat Linux operating system. It is easier to configure the PXE server for installing the operating system over FTP than NFS.

### For NFS Installation

11. Configure a NFS mountpoint .
12. Copy the RedHat CD-ROM to the path for the mountpoint.

## For FTP Installation

For FTP installation, follow the steps outlined below:

13. Copy the RedHat CD-ROM to /home/ftp for anonymous FTP access.

Upon completion of these steps, the RedHat CD files are available over NFS or FTP, for the PXE boot image to use for installation. The next section describes how to install RedHat Linux via PXE to a target.

## Launching the PXE Image for Red Hat Linux 6.2 or later

If you have completed all the steps above, you are now ready to launch the PXE image for Red Hat 6.2 or later Linux.

1. Connect the target server and the PXE server on an isolated network. Once PXE support has been enabled and setup to boot to the network, power on the target server.
2. Press **F12** at POST for network boot. The target server connects to the PXE server and attempts to obtain an IP address from the DHCP server.

---

**Note:** If the "Show Setup" prompt is disabled on a ProLiant DL360, this **F12** will not appear. The system will boot depending upon the order selected in the "Option ROM Setup".

---

3. Press **F12** again to begin the network boot and download the PXE image. After the Linux image takes over, the Linux installation process begins. Several prompts for language and keyboard appear.
4. Select FTP, NFS, or HTTP access to the RedHat CD-ROM when prompted. Enter the PXE-Server's IP address and corresponding path to the RedHat CD-ROM.

After completing the steps above, the remainder of the installation works the same as a regular CD-ROM installation.

## ProLiant Health Driver for Linux

A ProLiant Health driver is now available for Linux (cpqhealth) users. This driver provides hardware monitoring support for select ProLiant servers using Red Hat Linux 6.2 and above. The driver is available through the Compaq Server Download Center website <http://www.compaq.com/support/files/servers/us/index.html>.

Addition information on using this driver is available in the Linux Health Driver *How-to* document located at <ftp://ftp.compaq.com/pub/products/servers/linux/linuxhealth.pdf>.

## Appendix - Web Resources

In addition to hardware and software products, Compaq also provides information enabling you to stay current on the latest developments and assisting you in making deployment decisions.

Compaq ActiveAnswers™ gives you the benefit of our experience to help manage your system and reduce the time, risks, and complexity associated with deploying solutions.

Compaq ActiveUpdate offers proactive notification and delivery of the latest software updates. Do not waste time searching the web. Subscribe to Compaq ActiveUpdate for automatic delivery of software updates for your Compaq servers, desktops, workstations, and portables.

If you require more timely access to information products, Compaq provides a service called Compaq Info Messenger, which can be accessed through the Compaq website. If you submit a profile to Compaq Info Messenger, telling it what platforms and operating systems you are interested in, the service tracks your areas of interest and will advise you when related information products are released.

Customer Advisories inform you of any known problems and workarounds because of a Service Pack release.

Communiqués and press releases announce the availability of new products and versions.

Service Advisories notify Compaq resellers and retailers of any known service-related issues and provide them with the information they need to effectively support their customers.

Solution Stories describe how Compaq customers have addressed their business needs through the combination of Compaq products and third-party software products.

TechNotes and Tech Briefs update customers on the latest developments in Compaq products.

White papers inform you of ways to optimize your environment and obtain the maximum benefit from software enhancements.

These information products range from those with no specific OS focus to those that address specific OS issues and answers. Information products specific to Linux are collected and distributed as part of the Compaq Resource Paqs produced twice a year.

Table 1 lists Compaq resources on the web.

Table 2 lists other helpful web resources to assist in setting up a Linux PXE server.



**Table 1. Compaq web resources**

Item	Web Location
Compaq and Linux website	<a href="http://www.compaq.com/products/software/linux/">http://www.compaq.com/products/software/linux/</a>
Opensource@Compaq.com website	<a href="http://opensource.compaq.com/">http://opensource.compaq.com/</a>
Compaq ActiveAnswers	<a href="http://www.compaq.com/activeanswers">http://www.compaq.com/activeanswers</a>
Compaq ActiveUpdate	<a href="http://www.compaq.com/products/servers/management/activeupdate/index.html">http://www.compaq.com/products/servers/management/activeupdate/index.html</a>
Compaq Info Messenger	<a href="http://www.compaq.com/infomessenger">http://www.compaq.com/infomessenger</a>
Compaq Insight Manager XE	<a href="http://www.compaq.com/manage">http://www.compaq.com/manage</a>
Compaq Management CD	<a href="http://www.compaq.com/support/files/server/MGMTSOL/index.html">http://www.compaq.com/support/files/server/MGMTSOL/index.html</a>
Compaq Option ROMPaq	<a href="http://www.compaq.com/support/files/storage/index.html">http://www.compaq.com/support/files/storage/index.html</a>
Compaq SmartStart Subscription Service	<a href="http://www.compaq.com/products/servers/smartstart/index.html">http://www.compaq.com/products/servers/smartstart/index.html</a>
Compaq System ROMPaq	<a href="http://www.compaq.com/support/files/server/us/index.html">http://www.compaq.com/support/files/server/us/index.html</a>
Customer Advisories	<a href="http://www.compaq.com/support/techpubs/Customer_advisories/index.html">http://www.compaq.com/support/techpubs/Customer_advisories/index.html</a>
Press releases	<a href="http://www.compaq.com/newsroom/pr">http://www.compaq.com/newsroom/pr</a>
Compaq Server Software Download Center (complete listing of server support software)	<a href="http://www.compaq.com/support/files/server/us/index.html">http://www.compaq.com/support/files/server/us/index.html</a>
White Papers and other technical documents (complete listing)	<a href="http://www.compaq.com/support/techpubs/whitepapers/index.html">http://www.compaq.com/support/techpubs/whitepapers/index.html</a>

**Table 2. Helpful web resources**

Item	Web Location
Intel Wired for Management Development Tools	<a href="http://developer.intel.com/ial/wfm/tools/pxesdk20linux/">http://developer.intel.com/ial/wfm/tools/pxesdk20linux/</a>
Red Hat Linux website	<a href="http://www.redhat.com/index.html">http://www.redhat.com/index.html</a>
justlinux, the complete Linux Guide website	<a href="http://www.justlinux.com/">http://www.justlinux.com/</a>
Compaq / InformIT Linux website	<a href="http://compaq.informit.com/linux/content/">http://compaq.informit.com/linux/content/</a>
Linux HOWTO docs	<a href="http://www.linuxdocs.org">http://www.linuxdocs.org</a>